


Explorer PRO Sound System

Portable Sound System Specifications

Advancing Technology

The next generation Explorer PRO is perfect for sound projection in indoor or outdoor settings and playing music during school activities. The unit delivers 110dB of intelligible speech from one sound system designed for users with no technical knowledge.

Featuring quick setup and easy to use controls, the new Explorer PRO is truly versatile with true AC/DC operation and improved battery life. The system is ideal for schools, corporate trainers and places of worship.

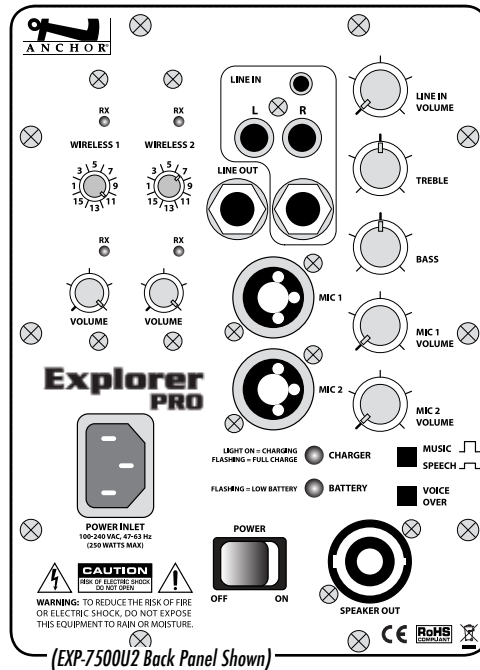

6-YEAR WARRANTY!

REACH CROWDS OF 800+

TRUE AC/DC - 110/220V POWER SUPPLY

110 DB OF CLEAR SOUND

SINGLE OR DUAL UHF WIRELESS W/
16 USER SELECTABLE CHANNELS

LED DISPLAYS BATTERY LEVEL
& CHARGE STATE

TWO MICROPHONE COMBO INPUT JACKS

SHORT CIRCUIT & THERMAL
OVERLOAD PROTECTION

6.5-INCH WOVEN FIBER WOOFER &
HIGH-OUTPUT HORN TWEETER

LIGHTWEIGHT AT JUST 23 POUNDS

IMPROVED "LIMITER" CIRCUITRY REDUCES
DISTORTION & INCREASES INTELLIGIBILITY

SPEECH PROJECTION MODE FOR
CRYSTAL-CLEAR VOICE PROJECTION

"VOICE OVER" MUSIC DUCKING FEATURE

DURABLE INJECTION-MOLDED
POLYPROPYLENE CASE

EXTERNAL SPEAKER OUTPUT POWERS
OPTIONAL COMPANION SPEAKER

MADE IN THE USA!

EXPLORER PRO ACCESSORIES

EXP-7501 Unpowered companion speaker

MIC-90 Professional dynamic, cardioid pattern handheld microphone

SS-550 Heavy-duty speaker stand

NL-EXP Nylon storage cover

HC-1620 Custom traveling hard case

SOFT-EXP Nylon case w/ rollers & handle for speaker, stand & accessories

EXP-MIC-TOTE Nylon mic/accessory bag w/ mounting strap

UHF WIRELESS

WH-6000 Wireless Handheld mic/transmitter

WB-6000 Wireless body-pack transmitter w/ handsfree microphone. Mic options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

EXPLORER PRO MODELS

EXP-7500 AC/DC powered sound system

EXP-7500U1 1 built-in wireless receiver

EXP-7500U2 2 built-in wireless receivers

EXPLORER PRO TECHNICAL SPECIFICATIONS

Rated Power Output	75 watts AC/DC mode
Max SPL @ Rated Power	110 dB @ 1 meter
Frequency Response	80 Hz - 16 kHz
AC Power Reqs.	90 - 264 VAC, 50/60 Hz
Dimensions (HWD)	16.5 x 10.5 x 10" / 42 x 27 x 25 cm
Weight	23 pounds / 10.4 Kg

Inputs	
Microphone (2 combo)	Lo-Z (1 k ohm), balanced, XLR 12 VDC condenser mic phantom power Hi-Z (10 k ohm), unbal, 1/4" phone
Auxiliary (line)	Hi-Z (10 k ohm), unbal, 1/8" & 1/4"
Sensitivity For Rated Output	
Line	-8.4 dBV (380 mVrms)
Mic (unbal & bal)	-49 dBV (3.63 mVrms)
Outputs	
Line (post fader)	Lo-Z, buffered, 1/4" unbal/bal
Speaker	4-pole Neutrik Speakon®



(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



Anchor Audio, Inc.
Portable Sound Systems • Torrance, California

888/444-6077

www.anchoraudio.com